






Ice Finger

# IMF 35 HC



Self-contained ice maker - Paddle system  
Daily production up to 47 kg

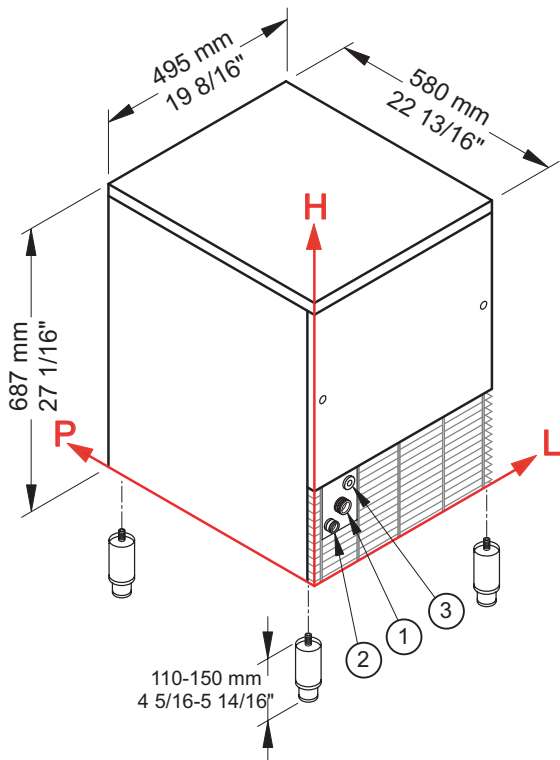

## ► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

## ► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	47 kg					
	50° F		104 lbs				
	21° C			38 kg			
	70° F				84 lbs		
	32° C					33 kg	
	90° F						73 lbs

## ► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 111 mm / 4 6/16" - 196 mm / 7 11/16" - 3/4"      ② Water out.: 49 mm / 1 15/16" - 151 mm / 5 15/16" - 24 mm / 15/16"
- ③ Electrical connections: 156 mm / 6 2/16" - 232 mm / 9 2/16"

## ► Technical information

Production in 24h	38 kg / 84 lbs
Store capacity, up to	15 kg / 33 lbs
Cooling system	A - W
Kind of cube	A-20g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	275 W
Fuse	10 A
Electrical consumption	17 kWh/100kg

Water consumption	A: 3 l/kg - 36 gal/100 lbs
	W: 14 l/kg - 168 gal/100 lbs
Sizes (L-P-H mm)	495 - 580 - 687
(L-P-H in)	19 8/16 - 22 13/16 - 27 1/16
Sizes with pack (L-P-H mm)	550 - 630 - 880
(L-P-H in)	21 10/16 - 24 13/16 - 34 10/16
Net weight	47 kg / 104 lbs
Gross weight	55 kg / 121 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet  
Standard Cube (20 g)  
Ambient temperature +21° C  
Water temperature +15° C  
Electrical consumption at +32° C (standard voltage)  
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued March 2021



[www.bremaice.it](http://www.bremaice.it)  
[info@bremaicegroup.it](mailto:info@bremaicegroup.it)

We are Brema

